




INSTALLATION INSTRUCTIONS Round Cable Operated Damper

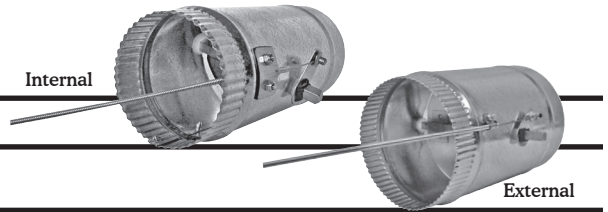

INTERNAL CABLE - CODR Series

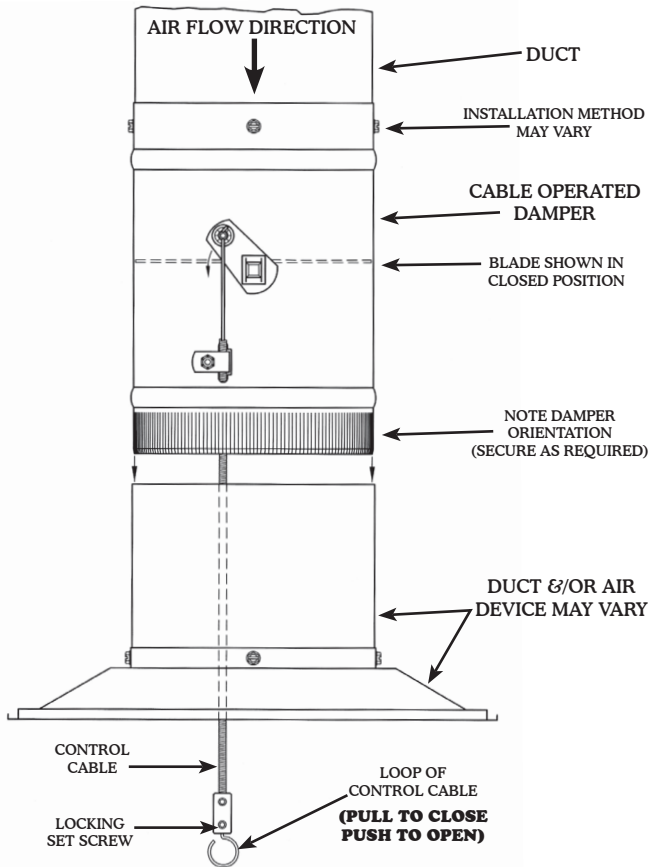

EXTERNAL CABLE - XCODR Series

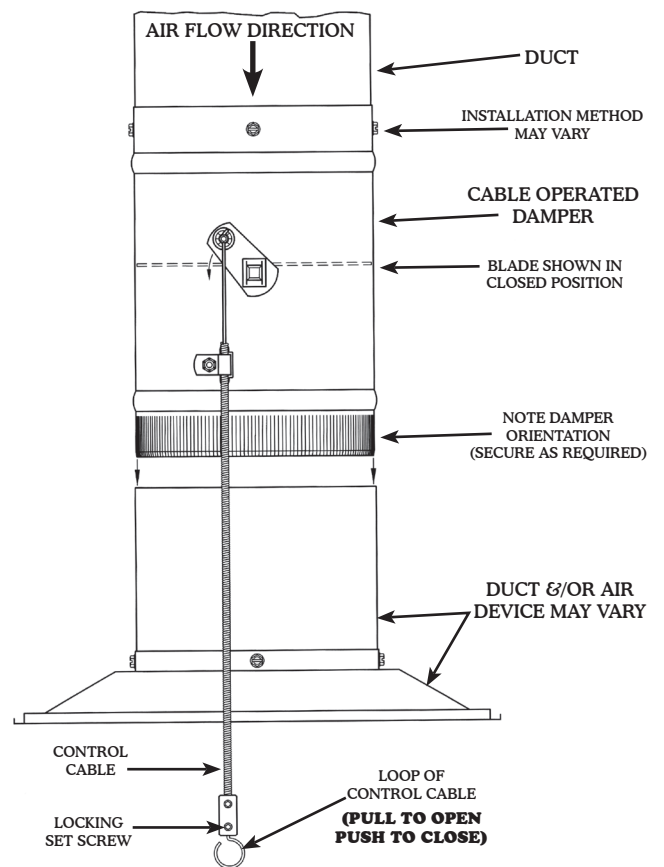

Step 1: Install the damper in the duct as required.

Step 2: Pass the damper control cable through the duct to the air device or the remote adjustment point.

Step 3: Adjust the damper blade position for proper air flow by pushing or pulling the looped wire end of the control cable.

Step 4: Tighten the set screw nearest to the looped wire end of the cable to lock the damper blade in the desired position.

Step 5: Store the control cable appropriately.

For adjustments: To re-adjust the damper blade position, loosen the locking set screw closest to the looped wire end of the control cable. Push or pull the looped wire until the desired air flow is achieved. Then tighten the locking set screw closest to the looped wire end of the control cable.

Step 1: Install the damper in the duct as required.

Step 2: Route the damper control cable to the remote adjustment point, being sure to avoid severe bending or kinking of the control cable.

Step 3: Adjust the damper blade position for proper air flow by pushing or pulling the looped wire end of the control cable.

Step 4: Tighten the set screw nearest to the looped wire end of the cable to lock the damper blade in the desired position.

Step 5: Store the control cable appropriately.

For adjustments: To re-adjust the damper blade position, loosen the locking set screw closest to the looped wire end of the control cable. Push or pull the looped wire until the desired air flow is achieved. Then tighten the locking set screw closest to the looped wire end of the control cable.

Install all devices in accordance with applicable electrical and mechanical codes.

Duro Dyne East • Bay Shore, NY 11706 • Phone: 631-249-9000 • Fax: 631-249-8346
 Duro Dyne Midwest • Fairfield, OH 45011 • Phone: 513-870-6000 • Fax: 513-870-6005
 Duro Dyne West • Santa Fe Springs, CA 90670 • Phone: 562-926-1774 • Fax: 562-926-5778
 DuroDyneCanada • Lachine • Quebec • Canada • Phone: 514-422-9760 • Fax: 514-636-0328

©2010 Duro Dyne Corporation
 Printed in USA 5/2010
 BP035435

www.durodyne.com Email: durodyne@durodyne.com

ALL DUROZONE DAMPERS FEATURE:
 • 5 year limited warranty • Controlled bypass •
 Maintenance free operation • Quick install mounting
 clips (except Round Dampers) • 100% factory testing
 • Custom dampers and special controls are available
 on request.