




DYN-O-STRUT™


SLOTTED STRUT

Slotted Strut is a common product used in Commercial Construction. With slotted holes at 2" centers, it allows for easy use with threaded rod and an assortment of threaded rod accessories that can engage and secure to the strut.

Dyn-O-Strut from Duro Dyne is cold-formed to size from low carbon strip steel making its strength ideal for use on a variety of commercial applications. It is Pre Galvanized ASTM A-653 Grade 33 Steel Sheet Zinc Coated by Hot Dip Process. This finish will protect from scratches, field cuts etc. through an anodic sacrificial process. This type of coating is suitable for extended exposure in dry or mildly corrosive atmospheres.

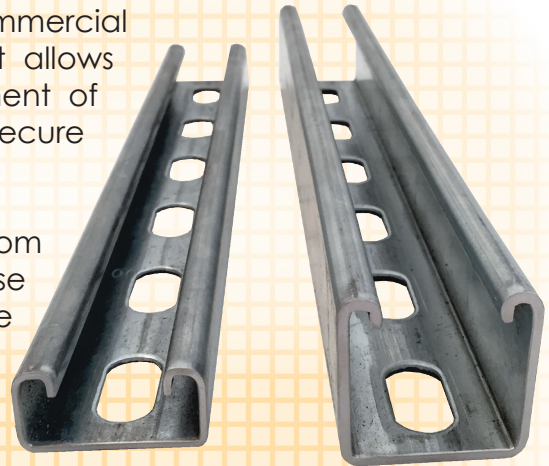

The bottom of Dyn-O-Strut features 1-1/8" X 9/16" (28.58 X 14.29) slots on 2" (50.8) centers. These pre-punched slots eliminate the need for precise field measuring for hole locations.

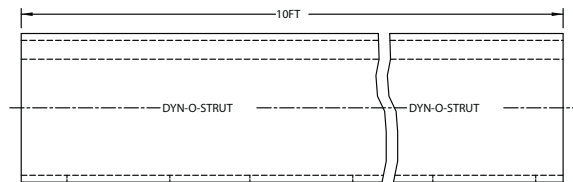

Duro Dyne offers Dyn-O-Strut in 14 gauge in both Deep and Shallow style channels. The Deep channel is also offered in 12 gauge. All Dyn-O-Strut is sold in 10 ft. lengths and 500 Ft. per bundle.

FEATURES:

- ***PRE-GALVANIZED ASTM A-653 GRADE 33 STEEL SHEET ZINC COATED BY HOT DIP PROCESS.**
- **Cold-formed to size from low carbon strip steel**
- **Slotted at 2" centers**

Ordering Information

Item #	Code	Description	Quantity
13045	DS1210-158	1-5/8x1-5/8x10ft 12 GA Slotted Dyn-O-Strut - Deep	500ft/Bundle
13049	DS1410-158	1-5/8x1-5/8x10ft 14 GA Slotted Dyn-O-Strut - Deep	500ft/Bundle
13047	DS1410-1316	13/16x1-5/8x10ft 14 GA Slotted Dyn-O-Strut - Shallow	500ft/Bundle

Duro Dyne East Division, Bay Shore, NY **631-249-9000** **Fax: 631-249-8346**
Duro Dyne Midwest Division, Hamilton, OH **513-870-6000** **Fax: 513-870-6005**
Duro Dyne West Division, Fontana, CA **562-926-1774** **Fax: 562-926-5778**
Duro Dyne Canada, Lachine, Quebec, Canada **514-422-9760** **Fax: 514-636-0328**
www.durodyne.com **E-mail: durodyne@durodyne.com**



© Duro Dyne Corp.
 Printed in USA 4/17
 BF013424