



SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form DNMM & DNMUVM Mini Dyn-O-Ties

DESCRIPTION

Duro Dyne Mini Dyn-O-Ties are ideal for use securing wire bundles, cables, ropes and more! They also fit into small spaces for the most difficult installation. They are available in Natural Nylon Color or UV Black. UV Black ties are made to resist Ultraviolet rays and adverse weather conditions when used in outdoor applications.

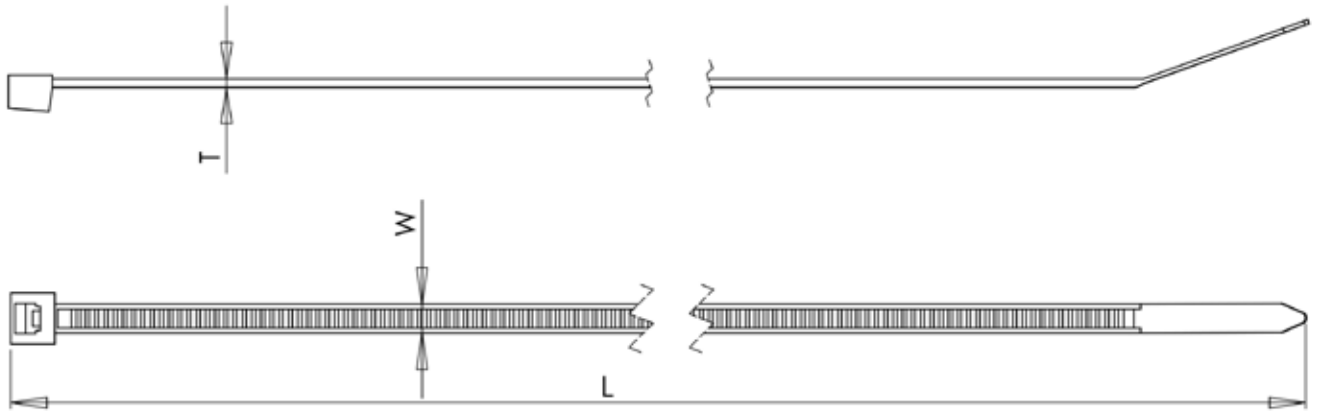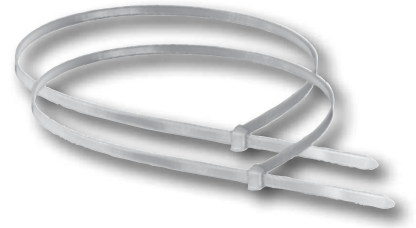

NYLON MINI DYN-O-TIES						
ITEM #	CODE	TYPE	COLOR	LENGTH	MAX. DIA.	PKG./CTN
7043	DNM05M	Nylon	Natural	5.91"	1.38"	10 Pks of 100
7042	DNM05UVM	Nylon	Black	5.91"	1.38"	10 Pks of 100
7018	DNM08M	Nylon	Natural	7.87"	1.97"	10 Pks of 100
7020	DNM08UVM	Nylon	Black	7.87"	1.97"	10 Pks of 100
7022	DNM11M	Nylon	Natural	11.02"	2.76"	10 Pks of 100
7024	DNM11UVM	Nylon	Black	11.02"	2.76"	10 Pks of 100
7026	DNM14M	Nylon	Natural	14.57"	4.02"	10 Pks of 100
7028	DNM14UVM	Nylon	Black	14.57"	4.02"	10 Pks of 100

STORAGE

To ensure superior performance, nylon cable tie products should be stored in a sealed polyethylene bag at room temperature in at least 50% humidity (recommended 80% RH). Limit the exposure of unused cable ties to extreme heat and cold. Should cable ties be exposed to extreme temperatures and/or extreme relative humidity, store at room temperature and at least 50% humidity (recommended 80% RH) for at least 24 hrs in a sealed bag prior to further use.

Duro Dyne East Division, Bay Shore, NY	631-249-9000	Fax: 631-249-8346
Duro Dyne Midwest Division, Hamilton, OH	513-870-6000	Fax: 513-870-6005
Duro Dyne West Division, Fontana, CA	562-926-1774	Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada	514-422-9760	Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com		

