


SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form DNMH Mini Dyn-O-Ties with Screw Hole Mount



DESCRIPTION


Duro Dyne Dyn-O-Ties are ideal for use securing wire bundles, cables, ropes and more! The addition of the mounting hole allows you to conveniently attach your cable tie to any surface. They also feature a rounded tip to prevent injury to the user and fit into small spaces. See our chart below for more details on these Mounting Hole Dyn-O-Ties.

Duro Dyne UV BLACK DYN-O-TIES are made to resist Ultraviolet rays and adverse weather conditions when used in outdoor applications.

Nylon Screw Hole Mount Dyn-O-Ties are also V2, flame rated.

STORAGE

To ensure superior performance, nylon cable tie products should be stored in a sealed polyethylene bag at room temperature in at least 50% humidity (recommended 80% RH). Limit the exposure of unused cable ties to extreme heat, cold, and low relative humidity. Should cable ties be exposed to extreme temperatures and/or below 50% relative humidity, store at room temperature and at least 50% humidity (recommended 80% RH) for at least 24 hrs in a sealed bag prior to further use.

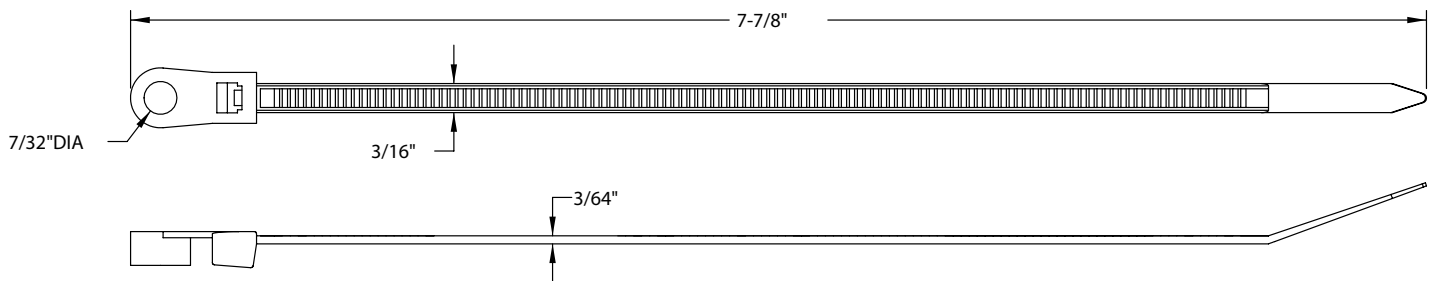

NYLON MINI DYN-O-TIES WITH SCREW HOLE MOUNT							
ITEM #	CODE	TYPE	COLOR	LENGTH	MAX. DIA.	TENSILE STRENGTH (LBS)	PKG./CTN
6367	DNMH08M	Nylon	Natural	7.87"	1.81"	50	10 Pks of 100
6368	DNMH08UVM	Nylon	Black	7.87"	1.81"	50	10 Pks of 100

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346
 Duro Dyne Midwest Division, Hamilton, OH 513-870-6000 Fax: 513-870-6005
 Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778
 Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328
 www.durodyne.com E-mail: durodyne@durodyne.com



©2018 Duro Dyne Corporation
 Printed in USA 5/3/18
 BO008466