




SWAGED DYNA-STUD

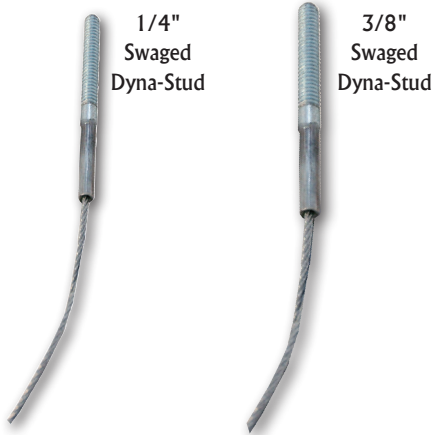

There are many ways to suspend duct work from a concrete or steel structure. One of the most common methods is to screw threaded rod into internally threaded expansion anchors. Sizing the threaded rod and using washers and nuts to complete support structures is time consuming. Dyna-Studs used with Dyna-Tite cable locks can greatly decrease labor time for constructing suspension systems.

The Dyna-Stud is a heavy duty threaded stud with one end of an aircraft rated cable attached. The stud is threaded into the expansion anchor without putting stress on the cable. This makes for a much safer and tighter connection. The raw end of the cable, in conjunction with the cable lock, is used to attach the object being supported.

Also available as kits, see reverse side.

Item #	Code	Description	For Use w/Cable Lock [^]	Safe Working Load* ⁺	Packaged
30052	SDSA1405WC3	1/4 Swaged Threaded Stud x 5ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30053	SDSA1410WC3	1/4 Swaged Threaded Stud x 10ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30054	SDSA1415WC3	1/4 Swaged Threaded Stud x 15ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30055	SDSA1425WC3	1/4 Swaged Threaded Stud x 25ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bg/bx
30373	SDSA3805WC3	3/8in Swaged Threaded Stud x 5ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30374	SDSA3810WC3	3/8in Swaged Threaded Stud x 10ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30375	SDSA3815WC3	3/8in Swaged Threaded Stud x 15ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30376	SDSA3825WC3	3/8in Swaged Threaded Stud x 25ft WC3-CL12 Dyna-Stud Cable Assembly	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bg/bx
30056	SDSA3805WC4	3/8 Swaged Threaded Stud x 5ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	10/bag-10bg/bx
30057	SDSA3810WC4	3/8 Swaged Threaded Stud x 10ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	10/bag-5bg/bx
30058	SDSA3815WC4	3/8 Swaged Threaded Stud x 15ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	10/bag-5bg/bx
30059	SDSA3825WC4	3/8 Swaged Threaded Stud x 25ft WC4-CL18 Dyna-Stud Cable Assembly	CL18-WC4	25-225 lbs. (12-102 kg)	5/bag-5bg/bx
30095	SDSA3805WC6	3/8in Swaged Threaded Stud x 5ft WC6-CL23 Dyna-Stud Cable Assembly	CL23-WC6	50-640 lbs. (25-291 kg)	10/bag-10bg/bx
30096	SDSA3810WC6	3/8in Swaged Threaded Stud x 10ft WC6-CL23 Dyna-Stud Cable Assembly	CL23-WC6	50-640 lbs. (25-291 kg)	10/bag-10bg/bx
30097	SDSA3815WC6	3/8in Swaged Threaded Stud x 15ft WC6-CL23 Dyna-Stud Cable Assembly	CL23-WC6	50-640 lbs. (25-291 kg)	10/bag-10bg/bx
30098	SDSA3825WC6	3/8in Swaged Threaded Stud x 25ft WC6-CL23 Dyna-Stud Cable Assembly	CL23-WC6	50-640 lbs. (25-291 kg)	5/bag-10bg/bx

1/4" & 3/8" drop ins sold separately. ^ Cable Lock not included. *Safe Working Loads are based on a 5:1 Safety Factor.

+Hanging at angles will reduce the Safe Working Loads. Please see our 'Effects of Hanging at Angles' table <http://www.durodyne.com/DTTesting.php>

Please visit our website www.durodyne.com for the most current product information.


10/2020
BD030413



Duro Dyne Corporate Headquarters, Bay Shore, NY
631-249-9000 • Fax: 631-249-8346
Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
www.durodyne.com • E-mail: durodyne@durodyne.com



SWAGED DYNA-STUD KITS

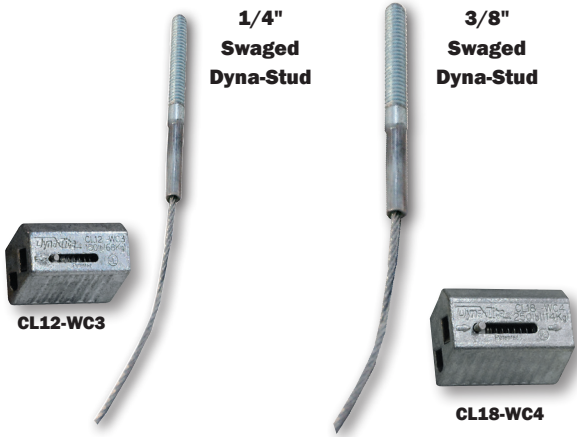

The Dyna-Stud is a heavy duty threaded stud with one end of an aircraft rated cable attached. The stud is threaded into the expansion anchor without putting stress on the cable. This makes for a much safer and tighter connection. The raw end of the cable, in conjunction with the cable lock, is used to attach the object being supported.

Kits include a cable lock as listed below.

Item #	Code	Description	For Use w/Cable Lock	Safe Working Load*†	Packaged
30377	SDS1405CL12K	1/4in Swaged Threaded StudX5ft WC3-CL12 Cable w/ CL12 Lock Kit	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30378	SDS1410CL12K	1/4in Swaged Threaded StudX10ft WC3-CL12 Cable w/ CL12 Lock Kit	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30379	SDS1415CL12K	1/4in Swaged Threaded StudX15ft WC3-CL12 Cable w/ CL12 Lock Kit	CL12-WC3	25-150 lbs. (12-68 kg)	10/bag-10bg/bx
30380	SDS1425CL12K	1/4in Swaged Threaded StudX25ft WC3-CL12 Cable w/ CL12 Lock Kit	CL12-WC3	25-150 lbs. (12-68 kg)	5/bag-10bg/bx
30381	SDS3805CL18K	3/8in Swaged Threaded StudX5ft WC4-CL18 Cable w/ CL18 Lock Kit	CL18-WC4	25-225 lbs. (12-102 kg)	5/bag-10bg/bx
30382	SDS3810CL18K	3/8in Swaged Threaded StudX10ft WC4-CL18 Cable w/ CL18 Lock Kit	CL18-WC4	25-225 lbs. (12-102 kg)	5/bag-10bg/bx
30383	SDS3815CL18K	3/8in Swaged Threaded StudX15ft WC4-CL18 Cable w/ CL18 Lock Kit	CL18-WC4	25-225 lbs. (12-102 kg)	5/bag-10bg/bx
30384	SDS3825CL18K	3/8in Swaged Threaded StudX25ft WC4-CL18 Cable w/ CL18 Lock Kit	CL18-WC4	25-225 lbs. (12-102 kg)	5/bag-5bg/bx

1/4" & 3/8" drop ins sold separately.

*Safe Working Loads are based on a 5:1 Safety Factor

†Hanging at angles will reduce the Safe Working Loads. Please see our 'Effects of Hanging at Angles' table <http://www.durodyne.com/DTTesting.php>

Please visit our website www.durodyne.com for the most current product information.

10/2020
BD030413



Duro Dyne Corporate Headquarters, Bay Shore, NY
631-249-9000 • Fax: 631-249-8346
Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
www.durodyne.com • E-mail: durodyne@durodyne.com