






TOGGLE

The Dyna-Tite suspension system utilizes cable locks and wire rope to secure ductwork and equipment. This method has been shown to reduce installation time and improve safety at the job site when compared to traditional hanging methods such as threaded rod, perforated strap, and band iron.

The Dyna-Tite Toggle is a quick and easy way to establish a fixed end through a drilled or punched hole in the ceiling deck. For use with CL12-WC3 Cable Lock, DSL3 Strut Lock, KV12 Bracket Assembly or any other Dyna-Tite WC3 Cable Lock. Ensure that the hole is no larger than 7/16" in diameter. For static load applications only.

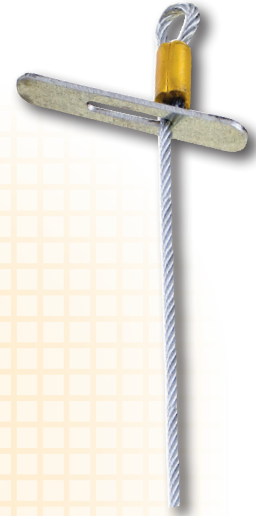

- Aviation grade galvanized wire rope
- Tested to verify breaking strengths
- Utilizes 7x7 construction

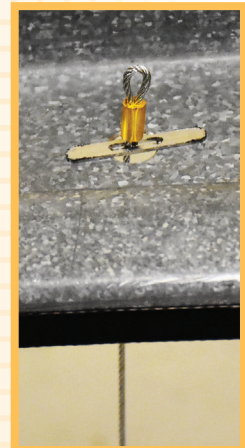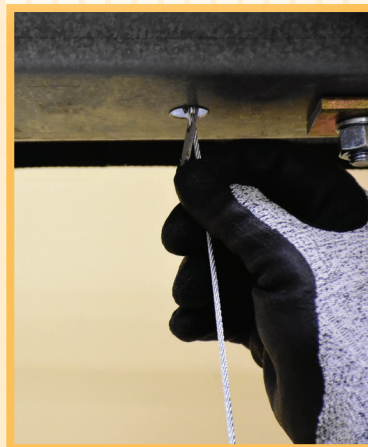

Item #	Code	Description	For Use With Cable Lock	Safe Working Load*+	Quantity
31046	ST05WC3	5ft. Single Toggle WC3-CL12 Cable	CL12-WC3	25-150 lbs. (12-68 kg)	10 bags of 10
31047	ST10WC3	10ft. Single Toggle WC3-CL12 Cable	CL12-WC3	25-150 lbs. (12-68 kg)	10 bags of 10
31048	ST15WC3	15ft. Single Toggle WC3-CL12 Cable	CL12-WC3	25-150 lbs. (12-68 kg)	10 bags of 10
31049	ST25WC3	25ft. Single Toggle WC3-CL12 Cable	CL12-WC3	25-150 lbs. (12-68 kg)	10 bags of 5

*Safe Working Loads are based on a 5:1 Safety Factor.

To ensure maximum safety, use only looped wire rope supplied by Duro Dyne with cable lock applications.

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346
 Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com

