

SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form Extreme Temperature Dyn-O-Ties®

DESCRIPTION

Extreme Temperature Dyn-O-Ties from Duro Dyne provide secure joints when connecting flexible duct. Designed for application in extreme climates with temperatures from -40°F to 221°F. These special feature Dyn-O-Ties are a high visibility yellow so they can be easily inspected on any job site.




STORAGE

To ensure superior performance, nylon cable tie products should be stored in a sealed polyethylene bag at room temperature in at least 50% humidity (recommended 80% RH). Limit the exposure of unused cable ties to extreme heat and cold. Should cable ties be exposed to extreme temperatures and/or extreme relative humidity, store at room temperature and at least 50% humidity (recommended 80% RH) for at least 24 hrs in a sealed bag prior to further use.

FEATURES

- High Impact Nylon
- High Visibility Yellow
- Withstands extreme temperatures
- Operating Temperature: -40°F to 221°F
- Minimum Installation Temperature: -4°F
- UV Resistant
- Designed to meet UL181

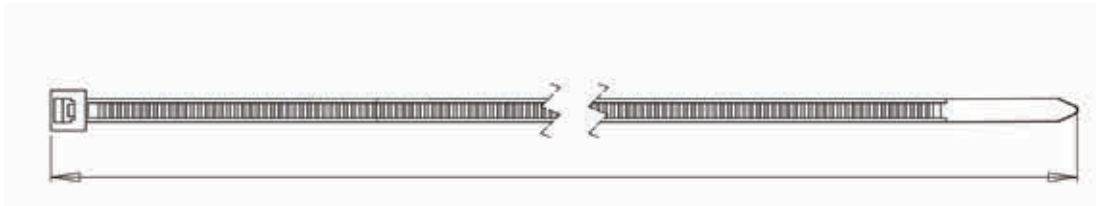

Proudly Made
 in the U.S.A.

Item #	Code	Description	Color	Length	Max. Dia.	Quantity
6317	AWT36USA	High Visibility Extreme Temp. Dyn-O-Tie - USA Made	Yellow	36"	11"	50/bag - 10 bags of 50/box

Duro Dyne East Division, Bay Shore, NY	631-249-9000	Fax: 631-249-8346
Duro Dyne Midwest Division, Hamilton, OH	513-870-6000	Fax: 513-870-6005
Duro Dyne West Division, Fontana, CA	562-926-1774	Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada	514-422-9760	Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com		



©2018 Duro Dyne Corporation
 Printed in USA 8/6/18
 BO008468