SUBMITTAL RECORD

| JOB |
|-----------------------|
| LOCATION |
| SUBMITTED TO |
| SUBMITTAL PREPARED BY |
| |
| APPROVED BY |
| DATE |




Submittal Form IFAD Insulated Flat Access Doors

FEATURES

- Insulated
- Tested to withstand 20" W.G. positive pressure & 10" of negative pressure
- · Closed cell Neogasket
- Bonding of Neoprene gasket to inside plate prevents leakage
- Conical springs between the two plates provides for easy installation
- High impact yellow plastic knobs are designed to avoid stripping and allow a tool-free operation
- Built-in stud stop to prevent loss of knob
- Template for duct-opening cut out insures proper hole size
- 4x8 and 8x12 doors are 22 gauge
- 12x16 doors are 20 gauge



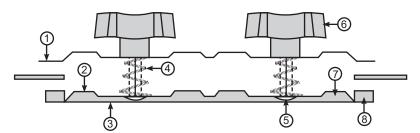

- 1. Outer Top Plate
- 2. Lower Inside Plate
- 3. Insulated Cover Plate
- 4. Conical Spring
- 5. Connecting Bolt
- 6. Hand Knob with Steel Insert
- 7. Insulation
- 8. Closed Cell Neoprene Gasket

| Item # | Code | Description | Packaging |
|--------|----------|----------------------------------|-------------|
| 22177 | IFAD48 | 4X8 Flat Insulated Access Door | 10 Pcs./Box |
| 22178 | IFAD812 | 8X12 Flat Insulated Access Door | 10 Pcs./Box |
| 22179 | IFAD1216 | 12X16 Flat Insulated Access Door | 5 Pcs./Box |

