

SUBMITTAL RECORD _____
 JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____



Submittal Form DTWD Dyna-Clamp



DESCRIPTION

The Dyna-Clamp is an efficient way to secure flex or rigid round duct connections. The stainless steel band can withstand up to 60 PSI, as well as extreme temperature conditions. The band is secured in place at the bridge by a slotted hex head screw. This zinc plated carbon steel screw can be flipped up away from the band to offer a quick release when adjustments are needed. Dyna-Clamps are available in stock sizes ranging from a 7" diameter to 20". Two or more clamps can also be connected together to accommodate duct diameters over 20".



FEATURES

- Manufactured from 200 series stainless steel.
- Secures with a 5/16" slotted hex head zinc plated carbon steel screw.
- 1/2" width
- Dyna-Clamps can handle up to 60 PSI
- Quick Release Feature for easy adjustments.
- Excellent weather resistance

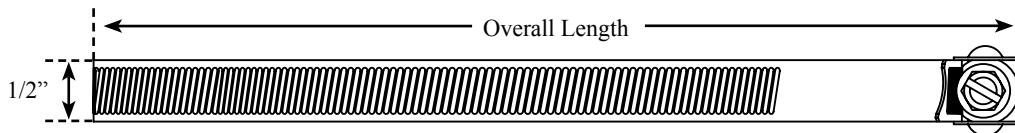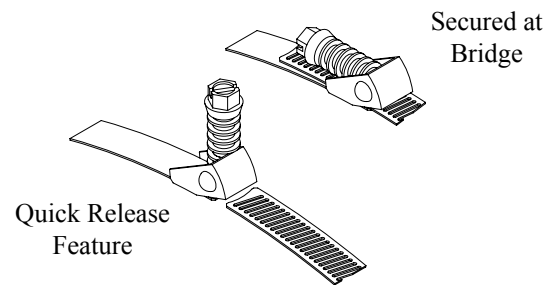

PART#	CODE	DESCRIPTION	MINIMUM DIAMETER	MAXIMUM DIAMETER	OVERALL LENGTH	QUANTITY
7012	DT7WD	7" Stainless Steel Dyna-Clamp	1.75"	7"	23.5"	100/box
7007	DT8WD	8" Stainless Steel Dyna-Clamp	1.75"	8.5"	28.25"	100/box
7008	DT10WD	10" Stainless Steel Dyna-Clamp	1.75"	10"	33"	100/box
7009	DT12WD	12" Stainless Steel Dyna-Clamp	1.75"	12.25"	40"	100/box
7010	DT15WD	15" Stainless Steel Dyna-Clamp	1.75"	15"	48.75"	100/box
7011	DT16WD	16" Stainless Steel Dyna-Clamp	1.75"	16.25"	52.5"	100/box
7013	DT18WD	18" Stainless Steel Dyna-Clamp	1.75"	18.5"	57.31"	100/box
7044	DT20WD	20" Stainless Steel Dyna-Clamp	1.75"	20"	63.58"	100/box

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com



©2014 Duro Dyne Corporation
 Printed in USA 7/14
 BO008411